


Datasheet

TAM5242-4TN00-0EA0



Output power	630 VA
Input	230 +/-5% V AC
Output	24 V AC
Category	Line, Control circuit und Safety isolating transformer



Picture representative

Electrical parameters

Phases	1
Nominal power	VA 630
Short-time power	kVA 2,35
Nominal input voltage	V AC 242-230-218
Nominal input current	A AC 2,92-3,07-3,24
Nominal output voltage	V AC 24
Nominal output current	A AC 26,3
Frequency	Hz 50...60
Short circuit voltage	% 3,70 20°C
Vector group	li0
Duty	continuous
Duty cycle	% 100
Winding material	CU
Winding losses	W 28,0
Iron losses	W 25,0
Total losses	W 53,0
Efficiency	% 92,0

Standards


Standards	EN 61558-2-1, -2-2, -2-6 UL 5085 / XPTQ2-8.E92271
-----------	--

Authorization / Certificate

Approvals	ENE cULus (further approvals possible on customer request)
Declaration of Conformity	CE

Environmental conditions

Operating temperature	°C	-25 ... +40
Storage temperature	°C	-25 ... +55
Extended temperature range	°C	up to +80 (after power reduction according to the load characteristics)

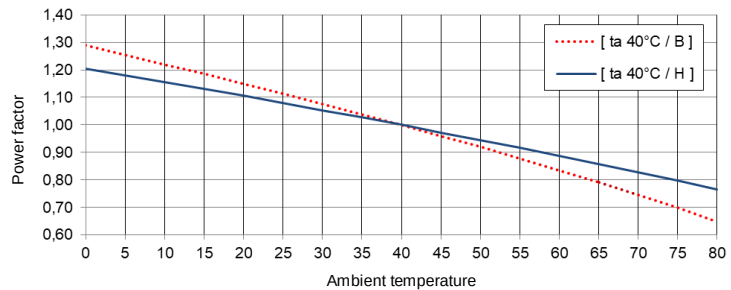

Relative humidity (without condensation)	%	5 ... 95
Cooling		natural cooling
Installation altitude		to 1000m above sea level, higher altitude possible with power reduction
Overvoltage category	(acc. EN 61558)	OVC III
Degree of pollution	(acc. EN 61558)	P2


Installation and mounting

Type of terminals	Screw / tab connection
Mounting type	Screw
Mounting position	see „Dimensional drawing“ at the end of the document
Dimensions (HxWxD)	see „Dimensional drawing“ at the end of the document
Mounting dimensions	see „Dimensional drawing“ at the end of the document
Oblong hole	see „Dimensional drawing“ at the end of the document
Clearance distance	see technical information in the chapter „Further information“

Security features

Insulation class	acc. EN	class B
Insulation class	acc. UL	CLASS 130
Protection		IP00 (other types of protection on request)
Protection class		I
Short-circuit strength		conditionally with protection

Connection table



Terminal block

Back side: 32-31
Front side: 1-2-3-4

	U _N [V AC]	I _N [A AC]	Terminals	Wiring	Protection
PRI1	242	2,92	1-4	-	3RV2411-1EA10 / 3,30A (ext.)
	230	3,07	1-3	-	3RV2411-1EA10 / 3,40A (ext.)
	218	3,24	1-2	-	3RV2411-1EA10 / 3,60A (ext.)
SEC1	24	26,3	31-32	-	3RV2021-4NA10 / 26,5A (ext.)



NOTE protection

Protection acc. IEC 60947 | Type suggestion with Siemens circuit breaker - alternatives are possible.
Protection for the North American market acc. UL - see chapter „Further information“.

General data

GTIN / EAN	4025515525790
Country of origin	Czech Republic
Packaging unit	1
Export sign	AL: N / ECCN: N
Customs tariff number	85043180
Gross weight - brutto	kg 8,4
Net weight - netto	kg 7,9

Further information

Complete catalogue Transformers / Power Supplies / Reactors / Filters

www.mdexx.com/online-katalog

Core product range Transformers

www.mdexx.com/core-products-range-transformers

Technical information

www.mdexx.com/technische-information

ePLAN / CAD data




www.eplandata.de/portal/en_EN/part/MDX.TAM5242-4TN00-0EAO

Service / Support

- Operating instruction [www.mdexx.com/BA_T_Transformatoren \(TAM, TAP, TAT, TAU, TBT, TBU\)](http://www.mdexx.com/BA_T_Transformatoren (TAM, TAP, TAT, TAU, TBT, TBU))
- Certificate www.mdexx.com/downloads/zertifikate
- EU Declarations of Conformity [www.mdexx.com/Transformatoren nach EN 61558 \(TAM, TAN, TAP, TAT, TAU, TAW\)](http://www.mdexx.com/Transformatoren nach EN 61558 (TAM, TAN, TAP, TAT, TAU, TAW))
- EAC Certifications www.mdexx.com/EAC_Transformatoren
- UL Certifications

US	product	www.mdexx.com/XPTQ2.E92271 (TAJ, TAM, TAP, TAW, TEF, TEV)
	isolation	www.mdexx.com/OBJY2.E106597 (CTB130, CTB155, ADS180, CCC180)
CA	product	www.mdexx.com/XPTQ8.E92271 (TAJ, TAM, TAP, TAW, TEF, TEV)
	isolation	www.mdexx.com/OBJY8.E106597 (CTB130, CTB155, ADS180, CCC180)

Dimensional drawing

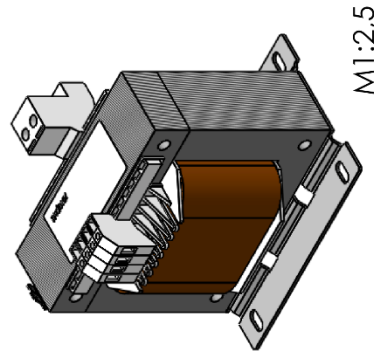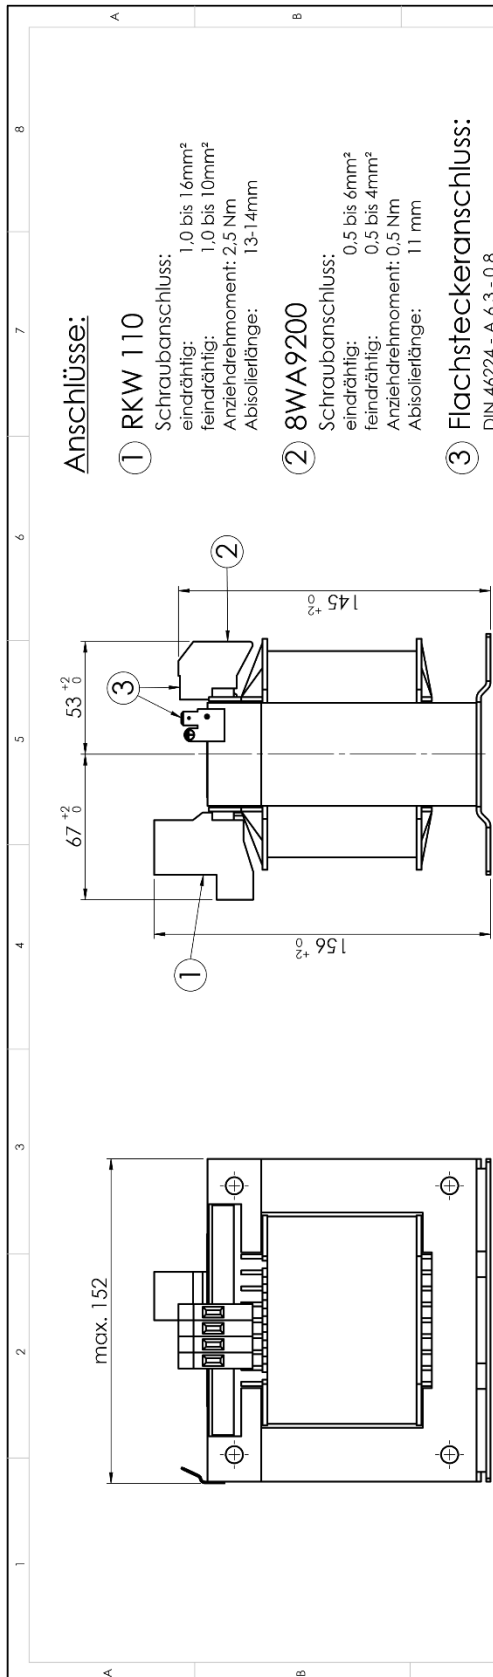

B	Montagezeichnung ergänzt.		Änderung		BORCHERS	
Index					Name	
Technische Aspekte			Freimäße n. Maßstab: 1:2 Halbozeug		Datum 07.07.2020 Gewicht: ca. 8 Kg	
Projekt			Benennung			
Zusatz	Erstellt	07.07.2020	Name		Transformator	
	Gepr.	21.07.2020	LINNECK		EI 150N/48	
	Freig.	21.07.2020	LINNECK		MLFB TAM524..	
			Format		Blatt:	
			mdexx GmbH		2	
			A 3		2 Bl.	
			Zeichnungsnummer		TZAM218-72	
			Ersetzt durch:			

Klemmenanzahl und Position können variieren!